



PORCELAIN COLLECTION

Contornare

A softly shaded sedimentary stone look, with fine veining and fossil detail, from living spaces to the terrace.



CONTORNARE RIGA 20 MM STRUCTURED

Sedimentary Stone, Softly Shaded

Contornare takes its look from a sedimentary stone rich in subtle veining and minute fossil inclusions. Balanced, delicately shaded textures bring an authentic, natural warmth to contemporary homes, indoors and out.

Built-in hygiene

Antimicrobial protection built into the Natural and Matt porcelain surfaces, always active, eliminating up to 99.9% of bacteria. Not included on Grip or 20 mm Structured tiles.

Soft underfoot, secure grip

Surfaces that combine slip resistance with a soft, pleasant feel to the touch.

Indoor to outdoor

Natural and Grip finishes are designed to match, carrying the same look from interior floors out to the terrace.

Decorative freedom

Chisel, linear, mosaic and patterned decors coordinate with the shades for walls and floors throughout the home.

MATERIAL

Coloured-body
porcelain

FINISHES

Natural ·
Grip ·
Structured

SLIP RATING

R10 Natural ·
R11 Grip

FIRE RATING

A1 wall · A1_{fl}
floor

SHADE VARIATION


V2 · Slight



02 COLOURS


5 Shades

Five soft, natural shades, from chalky white to deep grey, coordinated across floor, wall and outdoor formats.

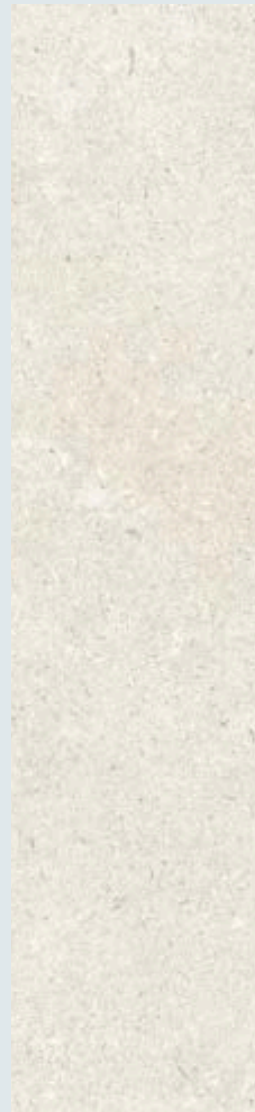


Tiraggio

V2 · SLIGHT VARIATION

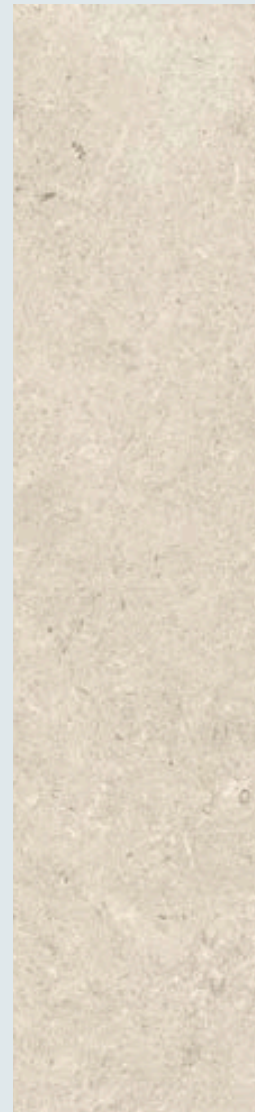


Disegno

V2 · SLIGHT VARIATION

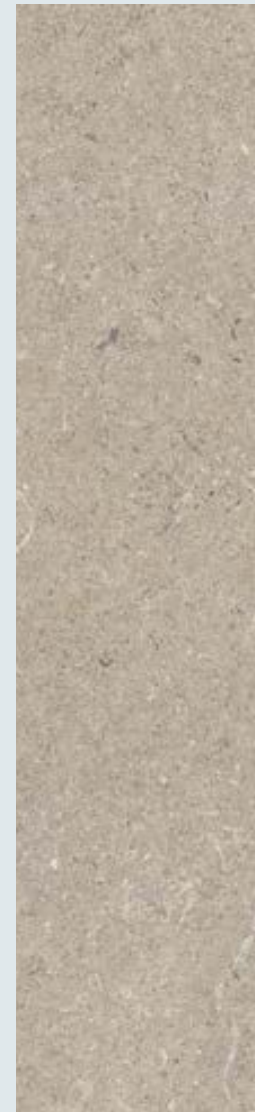


Riga

V2 · SLIGHT VARIATION

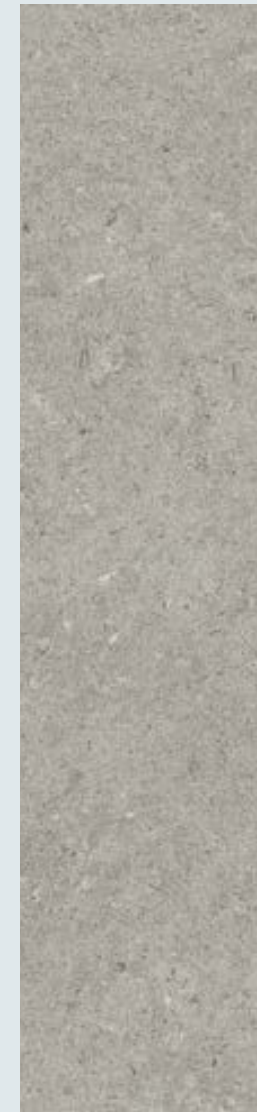

Forma

V2 · SLIGHT VARIATION

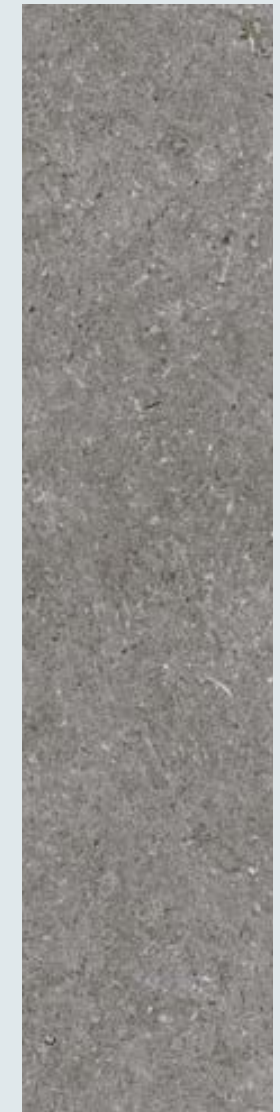

Tracciare

V2 · SLIGHT VARIATION

Colours shown are a guide only. Natural variation in shade and texture is a feature of the product; please view a physical sample before ordering.



CONTORNARE FORMA



CONTORNARE TIRAGGIO LEAF DECOR



CONTORNARE DISEGNO



CONTORNARE TRACCIARE



CONTORNARE TRACCIARE NATURAL



CONTORNARE RIGA

03 FORMATS

Sizes & Availability

FORMAT	SIZE (MM)	THICKNESS	TIRAGGIO	DISEGNO	RIGA	FORMA	TRACCIARE
FLOOR & WALL · NATURAL OR GRIP FINISH							
Field tile	1200 × 600	9 mm	◆	◆	◆	◆	◆
Field tile	600 × 600	9 mm	◆	◆	◆	◆	◆
Field tile	600 × 300	9 mm	◆	◆	◆	◆	◆
OUTDOOR · STRUCTURED FINISH							
Paver	1200 × 600	20 mm	◆	◆	◆	◆	◆
Paver	600 × 600	20 mm	◆	◆	◆	◆	◆
DECORS & TRIMS							
Chisel decor · Natural	1200 × 600	9 mm	◆	◆	◆	◆	◆
Linear mosaic · Matt	600 × 300	9 mm	◆	◆	◆	◆	◆
Mosaic (36 pcs) · Natural	300 × 300	9 mm	◆	◆	◆	◆	◆
Skirting · Natural / Matt	600 × 75	9 mm	◆	◆	◆	◆	◆
WALL TILES · INTERIOR WALLS ONLY							
Wall tile	600 × 300	8 mm	◆	◆	◆	◆	◆
Leaf decor	600 × 300	8 mm	◆	◆	–	–	◆
Lines decor	600 × 300	8 mm	◆	◆	–	◆	–

Chisel Decor

TIRAGGIO



DISEGNO



RIGA



FORMA



TRACCIARE



Mosaic



TIRAGGIO




DISEGNO



RIGA



FORMA



TRACCIARE

04 PACKING

Box & Pallet Data

DESCRIPTION	SIZE (MM)	THICKNESS	BOX			PALLET		
			PIECES	M ²	KG	BOXES	M ²	KG
Field tile · Natural / Grip	1200 × 600	9 mm	2	1.44	30.8	36	51.84	1108.8
Field tile · Natural / Grip	600 × 600	9 mm	4	1.44	30.8	32	46.08	985.6
Field tile · Natural / Grip	600 × 300	9 mm	9	1.62	35	32	51.84	1120
Paver · Structured	1200 × 600	20 mm	1	0.72	32.5	36	25.92	1170
Paver · Structured	600 × 600	20 mm	2	0.72	33.6	32	23.04	1075.2
Chisel decor · Natural	1200 × 600	9 mm	2	1.44	30.8	28	40.32	862.4
Linear mosaic · Matt	600 × 300	9 mm	4	0.72	15	30	21.6	450
Mosaic (36 pcs) · Natural	300 × 300	9 mm	5	0.45	9.375	60	27	562.5
Skirting · Natural / Matt	600 × 75	9 mm	12	0.54	12	60	32.4	720
Wall tile	600 × 300	8 mm	8	1.44	18.88	60	86.4	1132.8
Leaf / Lines / Geo decor	600 × 300	8 mm	8	1.44	18.88	20	28.8	377.6

All 9 mm and 20 mm tiles are rectified. Grip and 20 mm Structured tiles do not include the built-in antimicrobial protection.

Leaf (4 designs) and Lines (8 designs) decors are packed with designs mixed randomly in each box. Geo decor combines all five shades across 8 designs. 8 mm wall tiles and decors are for interior walls only.

Skirting: 7.2 linear metres per box. All packing data is indicative and subject to change.

05 PERFORMANCE

Technical Data

Coloured-body porcelain stoneware · ISO 13006-G and EN 14411-G, Group BIa-UGL

CHARACTERISTIC	TEST METHOD	REQUIREMENT	RESULT
Water absorption	ISO 10545-3	≤ 0.5%	0.05%
Breaking strength	ISO 10545-4	≥ 1300 N	2200 N (9 mm) · 13,600 N (20 mm)
Modulus of rupture	ISO 10545-4	≥ 35 N/mm ²	50 N/mm ²
Deep abrasion resistance	ISO 10545-6	≤ 175 mm ³	145 mm ³
Stain resistance	ISO 10545-14	Class 3 min.	Class 5 resistant
Chemical resistance*	ISO 10545-13	As declared by manufacturer	LA-HA resistant
Frost resistance	ISO 10545-12	No alteration	Resistant
Slip resistance	DIN EN 16165 Annex B	–	R10 Natural · R11 Grip / Structured
Pendulum test (wet)	BS EN 16165 Annex C	–	PTV 36+ (Sl. 96) Natural · PTV 36+ (Sl. 96 – Sl. 55) Grip / Structured
Shade variation	ANSI A137.1	As declared by manufacturer	V2 · Slight variation
Reaction to fire	EN 13823 · EN 9239-1	CPR (EU) 305/2011 · UNI EN 13501-1	Class A1 (wall) · Class A1 _{fl} (floor)
Recommended minimum joint**	Indoor (rectified) · Outdoor	–	2 mm · 5–6 mm approx.

* Excluding hydrofluoric acid and its derivatives. ** The joint width must be set by the installation supervisor unless regulated by national laying standards.

8 mm wall tiles and decors (glazed white-body, ISO 13006-L / EN 14411-L Group BIII-GL): water absorption > 10%, modulus of rupture 18 N/mm², breaking strength ≥ 600 N, not frost resistant, V2 shade variation, Class A1 (wall), 1 mm minimum joint. Interior walls only.



Request a Sample or Talk to Our Team

EMAIL

sales@keystoneco.co.uk

WEB

www.keystoneco.co.uk

PHONE

02476 422 580

ADDRESS

204 Duggins Lane, Tile Hill,
Coventry, CV4 9GP

We reserve the right to make product changes. Illustrations may be examples and may differ in appearance from the goods supplied. Colours shown are a guide only; please view a physical sample before ordering. Errors and misprints excepted. Our general terms and conditions apply to the conclusion of any order.

VERSION 10/26

