



Contornare

TECHNICAL
SPECIFICATION



CONTORNARE

A versatile collection of porcelain tiles, suitable for both interior and exterior applications. Available in 8mm, 9mm and 20mm thickness, offering a balance of elegance and durability.

SIZES

1200 x 600 x 20mm rectified grip
600 x 600 x 20mm rectified grip
1200 x 600 x 9mm rectified natural
1200 x 600 x 9mm rectified grip
600 x 600 x 9mm rectified natural
600 x 600 x 9mm rectified grip
600 x 300 x 9mm rectified natural
600 x 300 x 9mm rectified grip


mosaic chisel 1200 x 600 x 9mm rectified natural
wall tile 600 x 300 x 8mm rectified
wall decor leaf 600 x 300 x 8mm rectified
wall decor lines 600 x 300 x 8mm rectified
mosaic 300 x 300 x 8mm (36 pieces) rectified natural
mosaic linear 600 x 300 x 8mm (4pieces) rectified soft
skirting 600 x 75 x 8mm rectified natural

COLOURS

Tiraggio



Forma




Disegno




Riga




Tricciare




MOSAIC CHISEL



PATTERN LINEAR



MOSAIC



GEOMETRIC DESIGN



TECHNICAL DETAILS

TECHNICAL FEATURES	TEST METHOD	REQUIRED VALUES	AVERAGE VALUES
WATER ABSORPTION	ISO 10545-3	$\leq 0,5\%$	0,05%
MODULUS OF RUPTURE	ISO 10545-4	$\geq 35 \text{ N/mm}^2$	50 N/mm ²
THERMAL SHOCK RESISTANCE	ISO 10545-8	No provision	$\alpha \leq 7 \times 10^{-6} \text{ }^\circ\text{C}^{-1}$
CHEMICAL RESISTANCE	ISO 10545-13	As indicated by manufacturer	A RESISTANT
FROST RESISTANCE	ISO 10545-12	As indicated by manufacturer	RESISTANT



**-Contonare Forma
(Wall)**



-Contonare Riga (Wall)



**-Contonare Riga
(Floor & Wall)**



**-Contonare Tiraggio
(Floor)**


**-Contonare Geo
(Wall)**



**-Contonare Tracciare
(Floor)**



**-Contonare Tracciare
(Floor)**

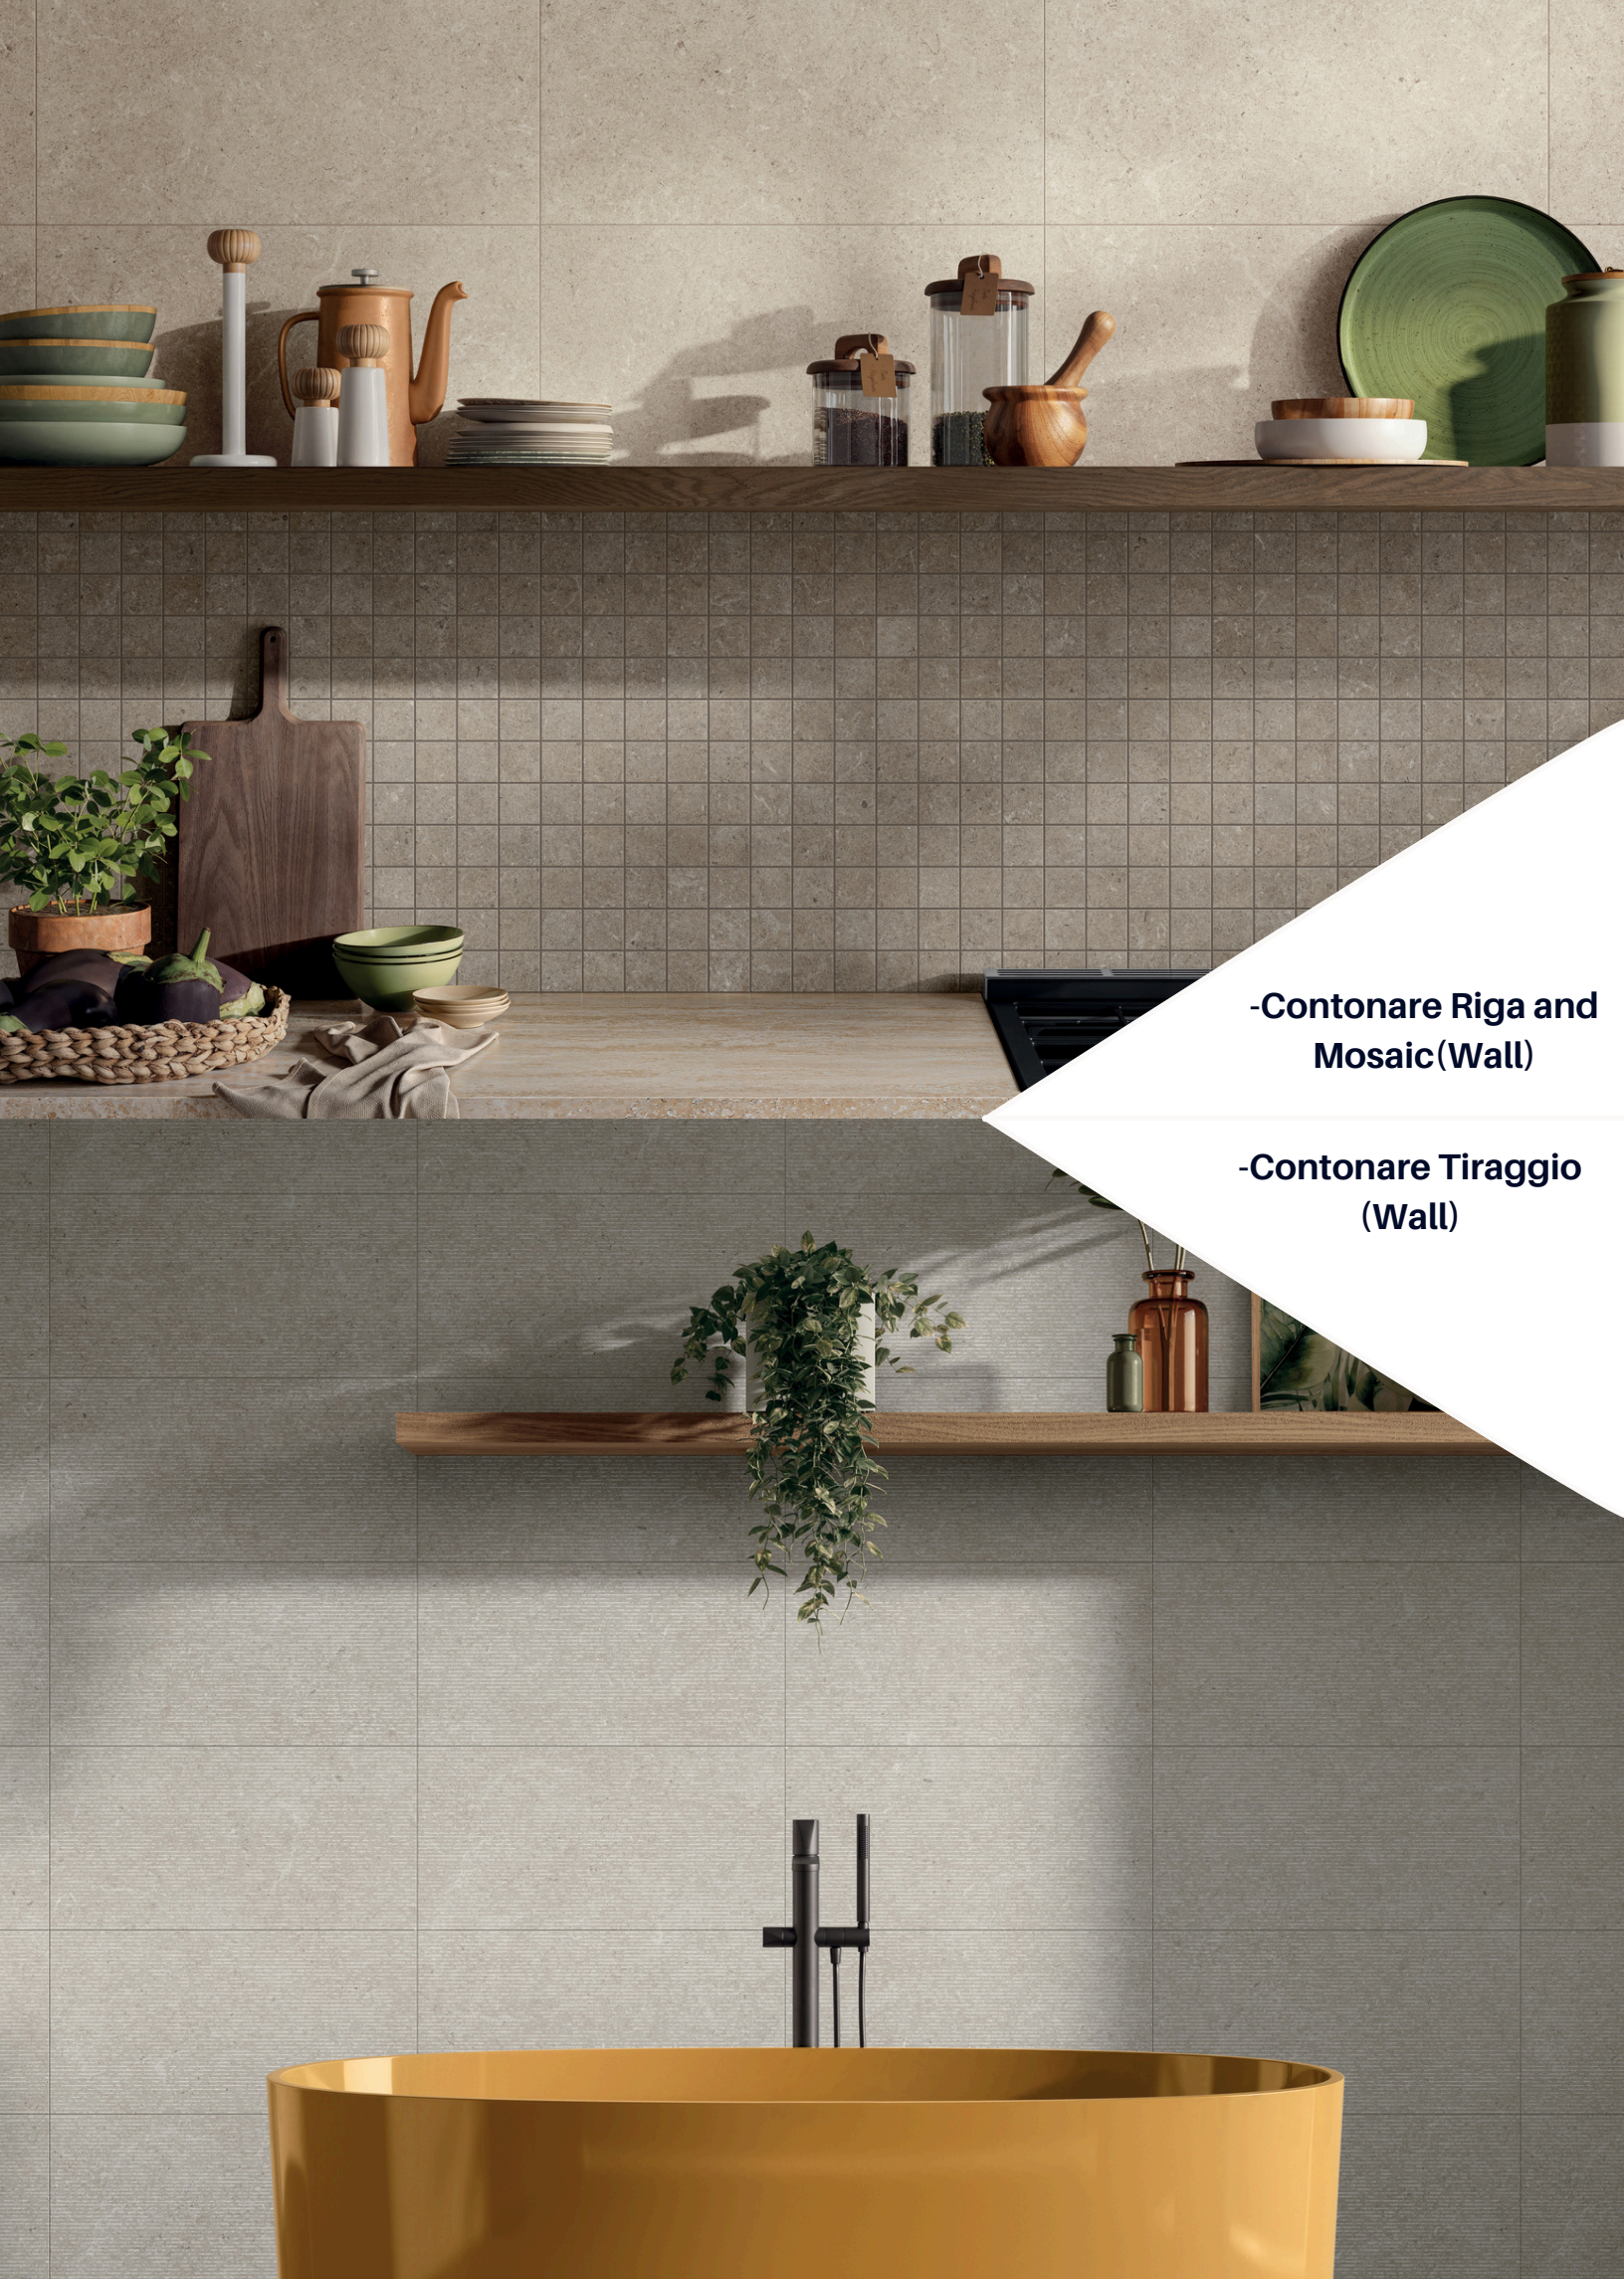

**-Contonare Riga and
Mosaic(Wall)**

**-Contonare Tiraggio
(Wall)**





204 Duggins Lane, Tile Hill,
Coventry, CV4 9GP
02475 092 859
www.keystoneco.co.uk