



Loch

TECHNICAL SPECIFICATION



This Range

A versatile collection of porcelain tiles, suitable for interior applications. Available in 8mm and 11mm, offering a balance of elegance and durability.

Sizes

1500 x 750 x 8mm rectified natural
1200 x 600 x 11mm rectified natural
1200 x 600 x 8mm rectified natural
750 x 750 x 8mm rectified natural

600 x 600 x 11mm rectified natural
600 x 600 x 8mm rectified natural
600 x 300 x 11mm rectified natural
600 x 300 x 8mm rectified natural



Heavy Footfall



Stairs



Interior



Wet Areas



Pool Edging


Colours




Grigio



Bianco



Marron



Beige




Dust



Sabbia

Technical Details

Technical Features	Test Method	Required Values	Average Values
Water Absorption	ISO 10545-3	$\leq 0.5\%$	Compliant
Modulus of Rupture	ISO 10545-4	$\geq 35 \text{ N/mm}^2$	48N/mm2
Breaking strength	ISO 10545-4	$\geq 1300 \text{ N}$	Conforms to standard
Thermal Shock Resistance	ISO 10545-9	Required	Resistant
Frost resistance	ISO 10545-12	Required	Resistant
Chemical resistance	ISO 10545-13	UBmin	Compliant

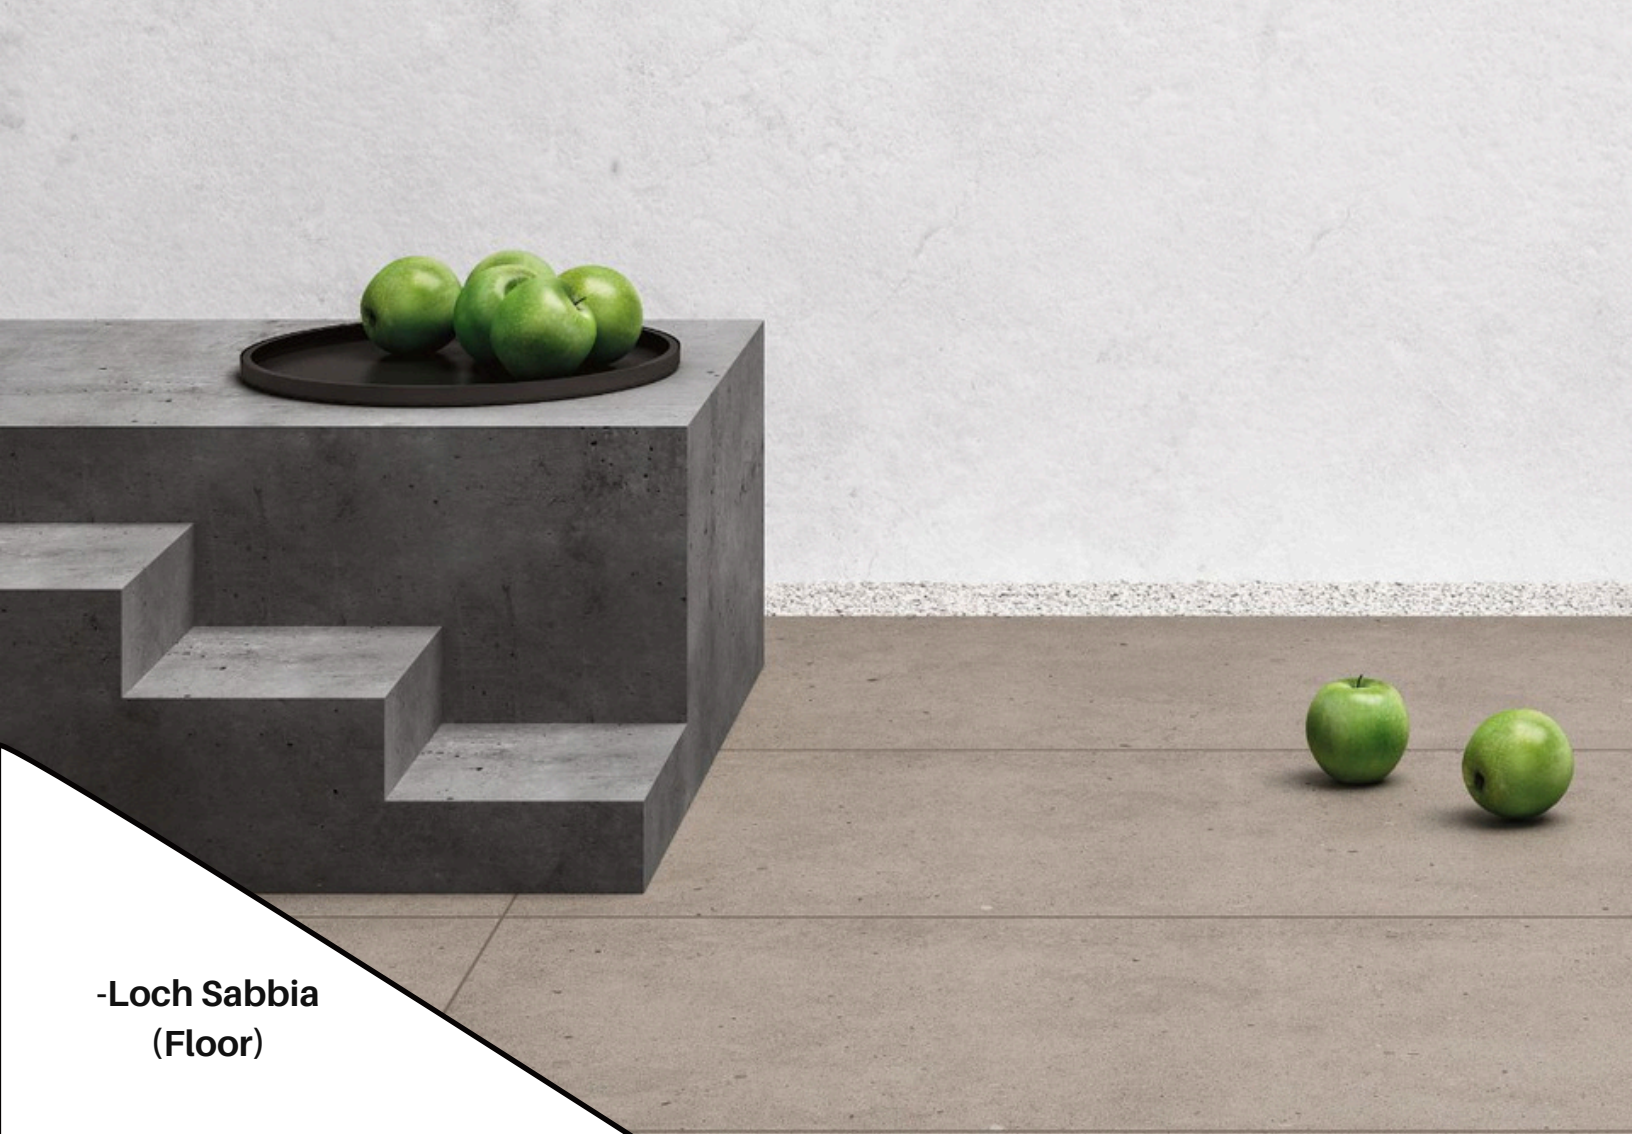

**-Loch Sabbia
(Floor)**



**-Loch Beige
(Floor)**



**-Loch Bianco
(Floor & Wall)**



**-Loch Marron
(Floor)**

**-Loch Grigio
(Floor)**



**-Loch Dust
(Floor)**





**-Loch Sabbia
(Floor)**



**-Loch Beige
(Floor)**



KEYSTONE

204 Duggins Lane, Tile Hill, Coventry,
CV4 9GP
02475 092 859
www.keystoneco.co.uk

