



ROCKFACE


TECHNICAL SPECIFICATION



This Range

Beautiful range of porcelain tiles, suitable for internal or external applications

Suitable for:



Walls


Sizes

400 x 160 x 9mm Splitface

Colours



Derby

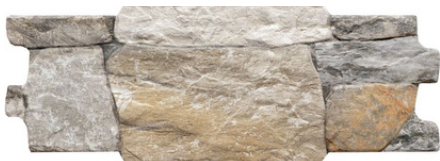

York



Cotswold



Dover



Llangollen

Technical Details - 8.5mm

Technical Features	Test Method	Required Values	Average Values
Water Absorption	ISO 10545-3	$\leq 0,5\%$	0.2%
Modulus of rupture	ISO 10545-4	$\geq 27 \text{ N/mm}^2$	55.7 N/mm²
Deep Abrasion Resistance	ISO 10545-6	$\leq 175 \text{ mm}^3$	Compliant
Linear Thermal Expansion	ISO 10545-8	No provision	$\alpha \leq 7.1 \times 10^{-6} \text{ }^\circ\text{C}^{-1}$
Stain Resistance	ISO 10545-14	Classe / Class 3 Min.	Class 5
Chemical Resistance (*)	ISO 10545-13	Resistant	Compliant
Frost Resistance	ISO 10545-12	No alteration	Resistant
Slip Resistance	BS 7976:2002	Declared value	R10
Thickness	ISO 10545-2	± 0.5	Compliant

Recommended minimum joint (**)		RECT (Interior)	2mm (RECT) circa/approx
(*) Excluding hydrofluoric acid and its derivatives. (**) The width of grout joints must be established by the installation supervisor, unless grout widths are regulated by national laying standards.			

Packing Details

Size	Pz/Box	Kg/Box	Mq/Box	Box/Pal	Kg/Pal	Mq/Pal
160 x 400 x 9mm	14	14.8	0.9	65	962	58.5



Derby

York





Cotswold

Dover





Llangollen





204 Duggins Lane, Tile Hill, Coventry,
CV4 9GP
02475 092 859
www.keystoneco.co.uk

