




SEGRATO

TECHNICAL SPECIFICATION

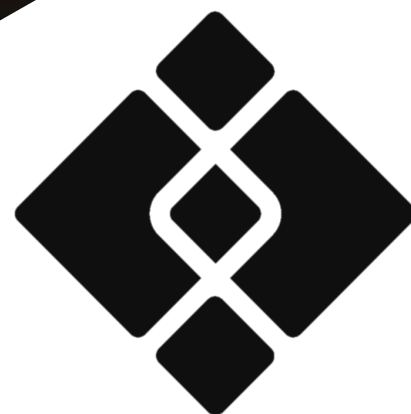

This Range

A versatile collection of porcelain tiles, suitable for interior applications. Available in 6.5mm , offering a balance of elegance and durability.

Sizes

2780 x 1200 x 6.5mm rectified polished




Heavy Footfall



Stairs



Interior



Walls


Colours




Marine



Marga




Blu



Maise




Nero



Blanche

Technical Details

Technical Features	Test Method	Required Values	Average Values
Water Absorption	ISO 10545-3	$E_b \leq 0,5\%$	Conforms to standard
Modulus of Rupture	ISO 10545-4	$\geq 7,5 \text{ mm} = \geq 1300 \text{ N}$ $< 7,5 \text{ mm} = \geq 700 \text{ N}$	Conforms to standard
Breaking strength	ISO 10545-4	$\geq 35 \text{ N/mm}^2$	Conforms to standard
Thermal Shock Resistance	ISO 10545-9	Required	Resistant
Frost resistance	ISO 10545-12	Required	Resistant
Chemical resistance	ISO 10545-13	Required	Resistant

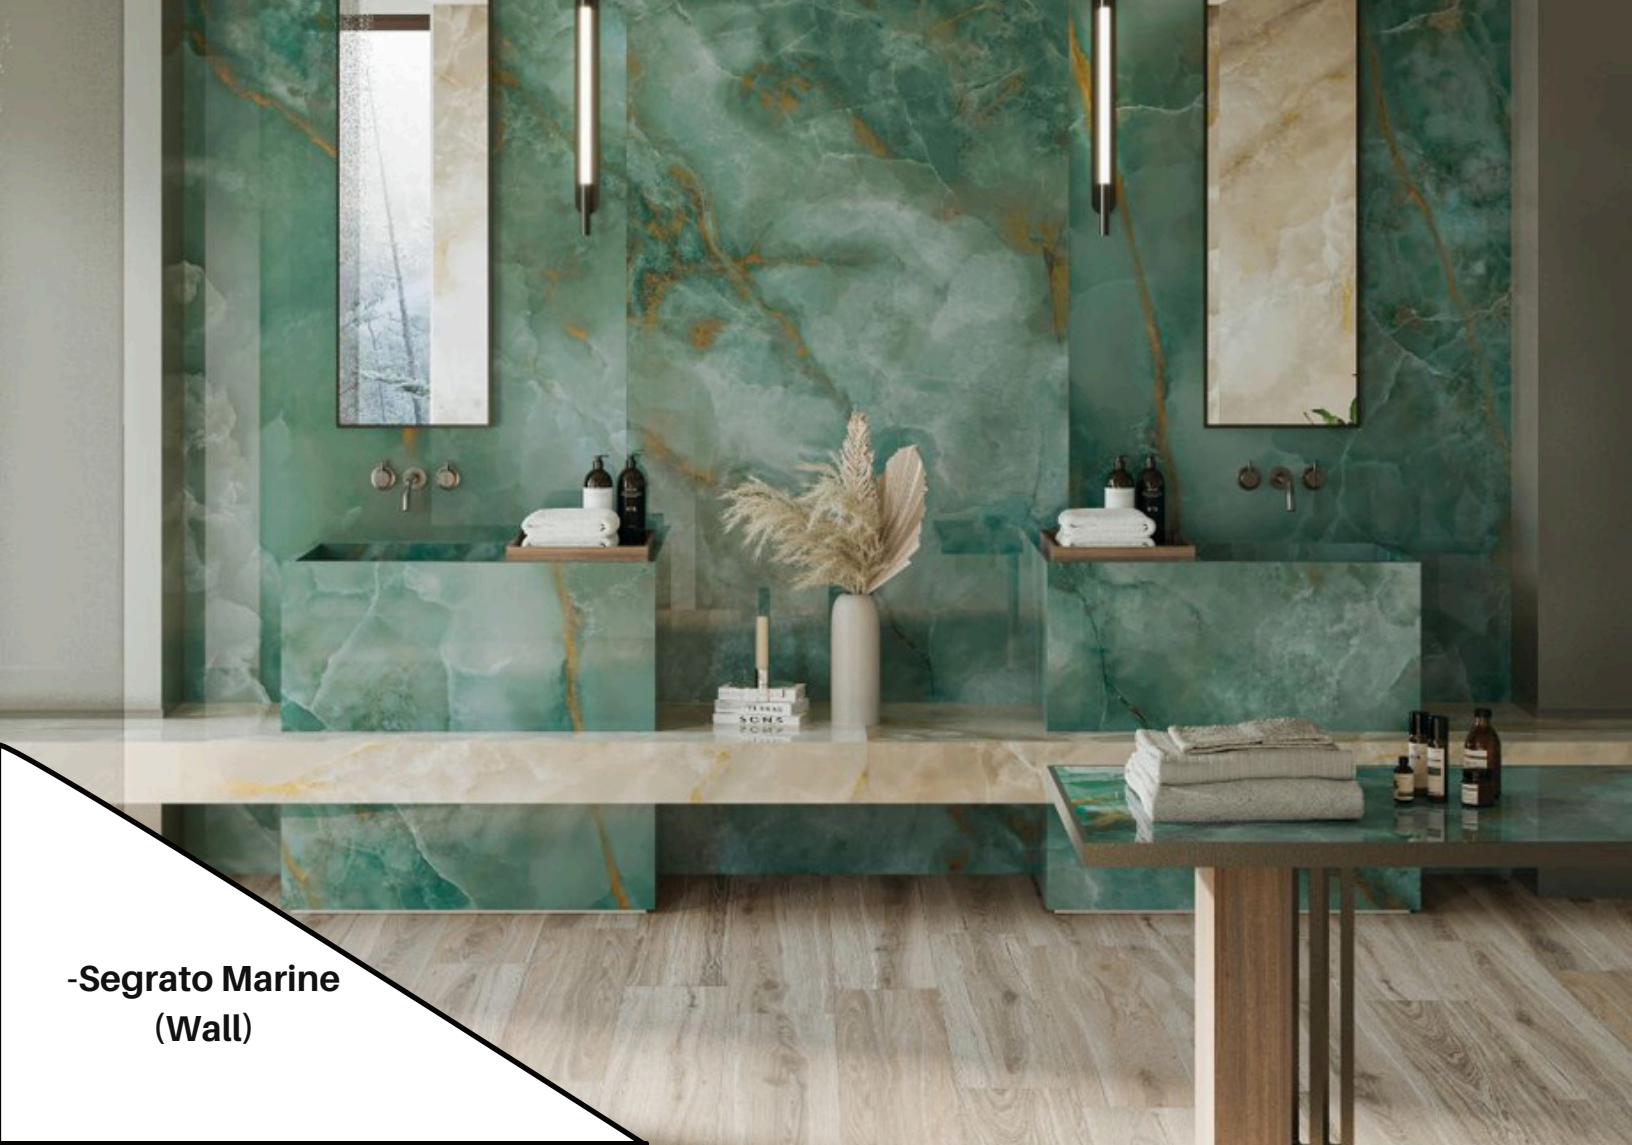

**-Segrato Marine
(Wall)**

**-Segrato Marga
(Wall)**





**-Segrato Marga
(Floor & Wall)**



**-Segrato Ocean
(Wall)**

**-Segrato Maise
(Floor)**



**-Segrato Blanche
(Floor & Wall)**



**-Segrato Maise
(Wall)**




**-Segrato Blanche
(Wall)**



**-Segrato Nero
(Floor & Wall)**



**-Segrato Marine
(Floor & Wall)**

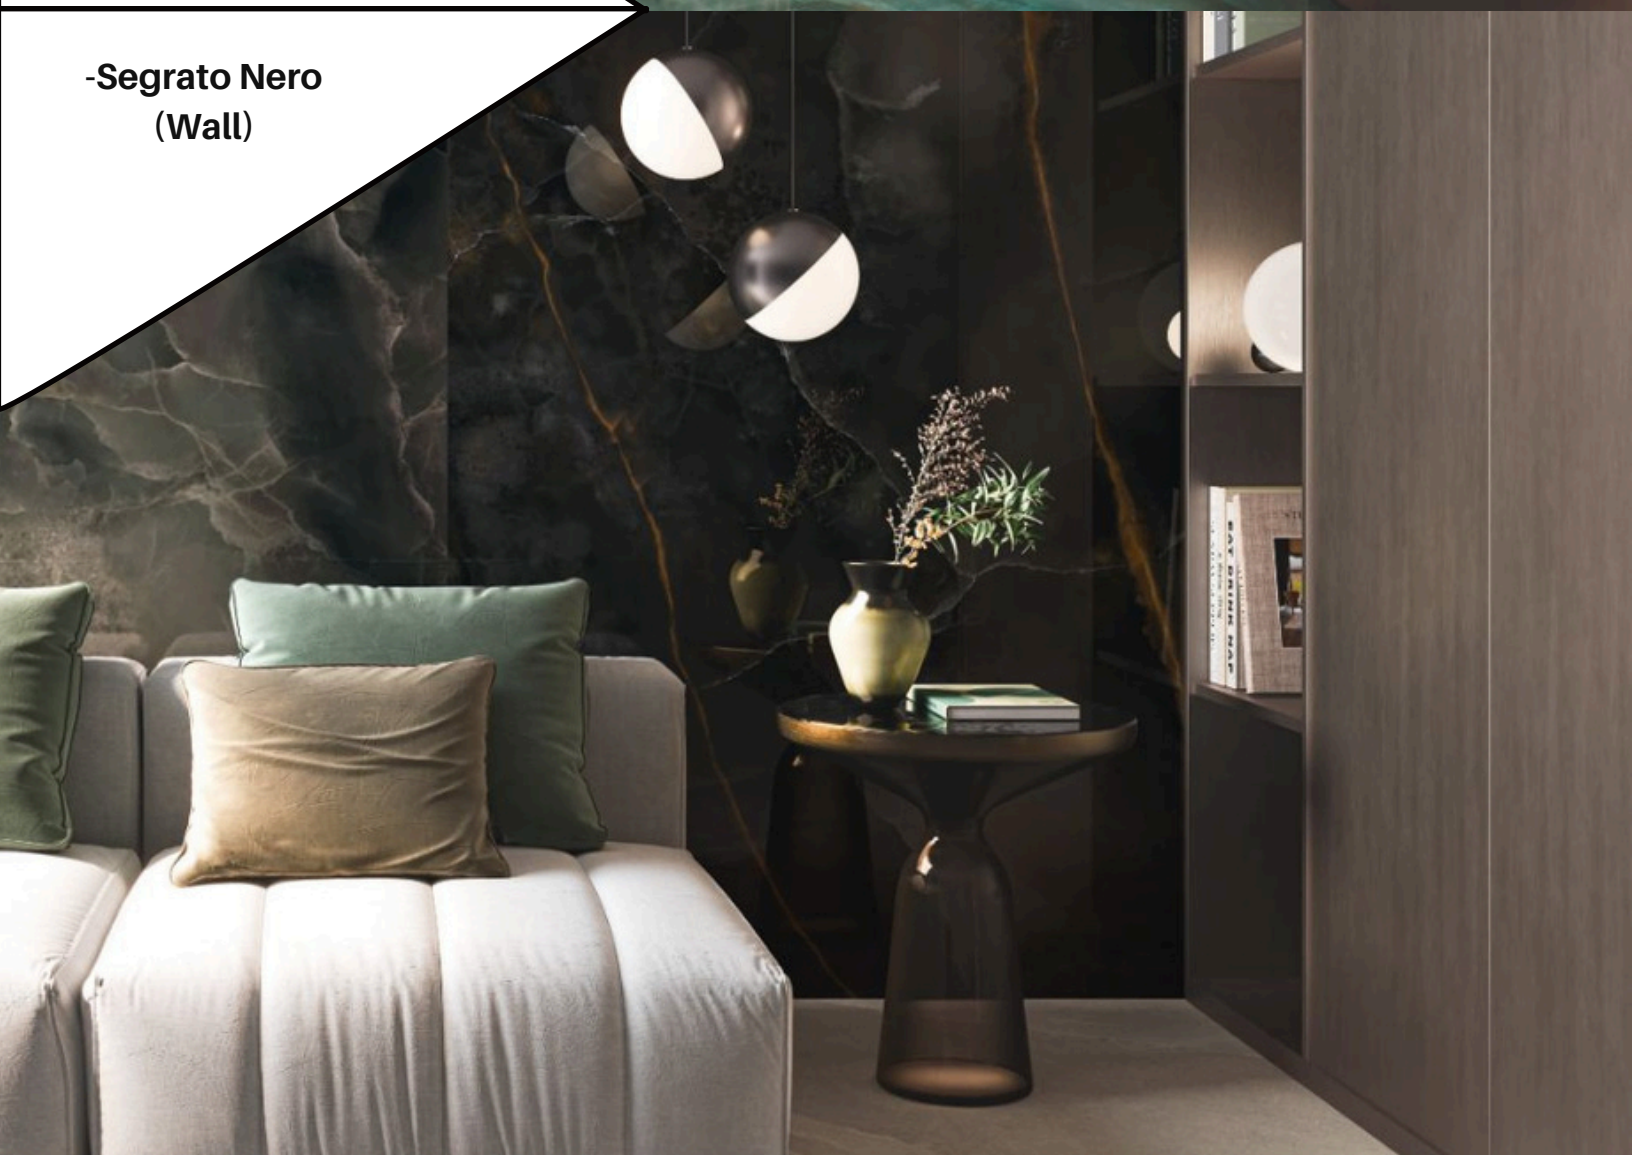

**-Segrato Nero
(Wall)**



**-Maglo White
Statuario**



**-Maglo White
Statuario)**



KEYSTONE

204 Duggins Lane, Tile Hill, Coventry,
CV4 9GP

02475 092 859

www.keystoneco.co.uk

